

TYPICAL SECTION SR 56

STA 220+09.52 TO STA 268+13.28
 DESIGN SPEED 70 MPH*

DATA
 AADT = 0
 AADT = 10000
 R = 2027
 T = 8.00% (24 HR)

GLIDER PAVEMENT

BASE GROUP 5 WITH
 IRAL COURSE (1") (TRAFFIC C)
 URSE FC-5 (0.75") (RUBBER)

STA 220+09.52 TO STA 226+00.00
 STA 265+15.00 TO STA 294+55.00
 STA 312+19.00 TO STA 326+63.00
 STA 334+50.00 TO STA 353+44.00

NEW CONSTRUCTION

TYPE B-12.5 (7") WITH
 TYPE SP STRUCTURAL COURSE (4") (TRAFFIC C)
 AND FRICTION COURSE FC-5 (0.75") (RUBBER)

STA 226+00.00 TO STA 265+15.00
 STA 294+55.00 TO STA 312+19.00
 STA 326+63.00 TO STA 334+50.00
 STA 353+44.00 TO STA 401+24.95


NEW CONSTRUCTION

OPTIONAL BASE GROUP 11 WITH
 TYPE SP STRUCTURAL COURSE (4") (TRAFFIC C)
 AND FRICTION COURSE FC-5 (0.75") (RUBBER)

*NOTE: DESIGN SPEED = 55 MPH
 FROM STA 220+09.52 TO STA 243+63.08

ASPHALT SIDEWALK

OPTIONAL BASE GROUP 1 WITH
 TYPE SP STRUCTURAL COURSE (1") (TRAFFIC C)
 TEMPORARY SLOPE EXPOSURE

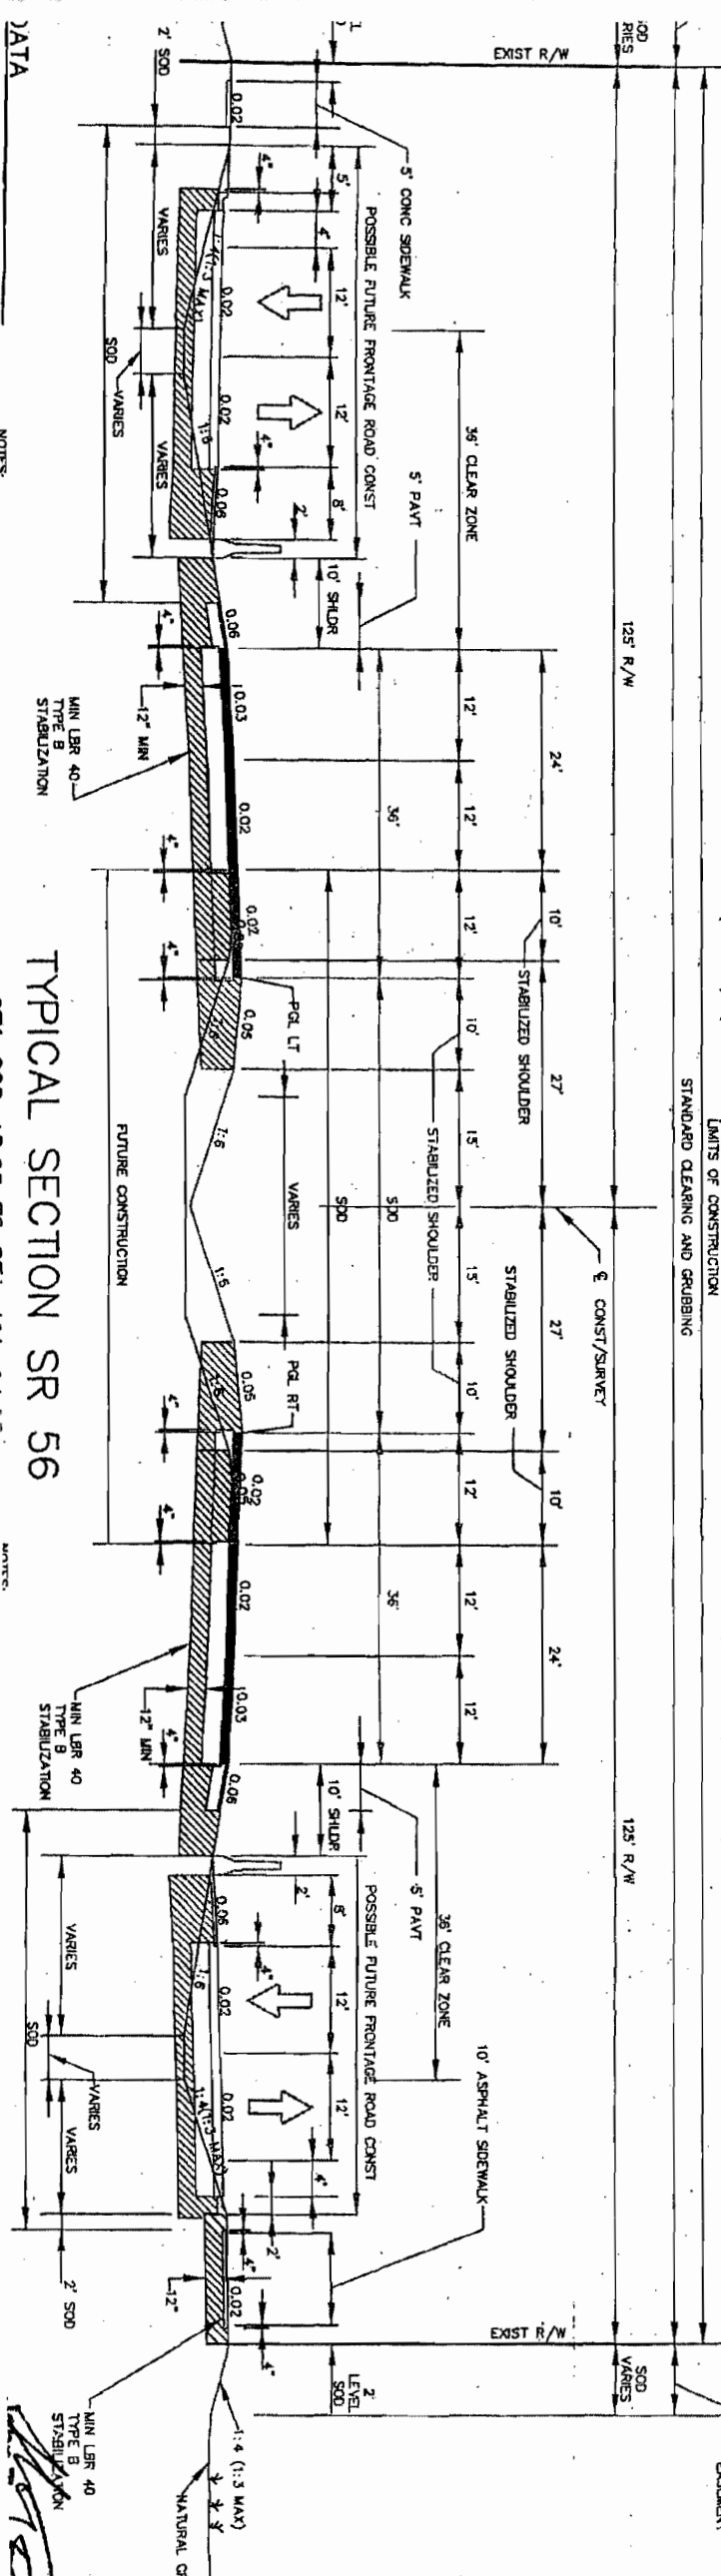

TYPICAL SECTION SR 56

DATA

NOTES

NOTES

MIN LBR 40
 TYPE B
 STABILIZATION